


WaterTec Dust

Morill Check Valve

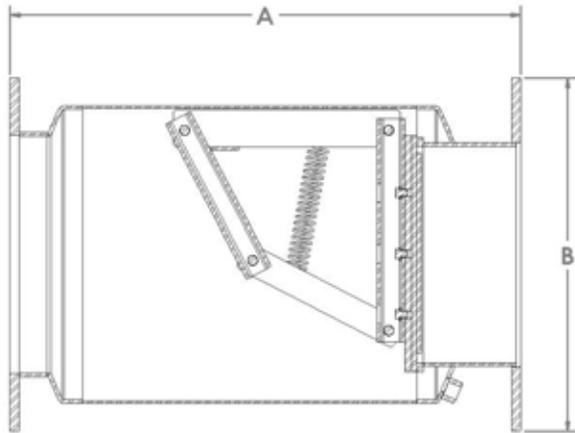

Part No.	Nom. Pipe Size	Length (A)	Flange O.D. (B)	Weight
1530-03	3"	9.00"	7.50"	18.0 lbs.
1530-04	4"	11.00"	9.00"	25.0 lbs.
1530-06	6"	12.50"	11.00"	39.0 lbs.
1530-08	8"	15.00"	13.50"	58.0 lbs.
1530-10	10"	17.00"	16.00"	81.0 lbs.
1530-12	12"	28.00"	19.00"	140.0 lbs.
1530-14	14"	30.50"	21.00"	220.0 lbs.
1530-16	16"	30.50"	23.50"	325.0 lbs.
1530-18	18"	30.50"	25.00"	350.0 lbs.
1530-20	20"	42.00"	27.50"	400.0 lbs.
1530-24	24"	46.00"	32.00"	638.0 lbs.

- Use E/G/S after Part Number for sizes 3"-10" (i.e. 1530E-08).
- Use G/S after Part Number for 12"-24" (i.e. 1530G-20).
- 3"-12" Flange Connections conform to ASME/ANSI drilling for Class 150.
- 14"-24" Flange Connections are AWWA Class B Flanges conforming to AWWA C207-07.
- Carbon Steel bodies conform to ASTM A53 Grade B material.
- Maximum working pressure of 150 PSI.

Ordering abbreviation(s):

- E : Epoxy
- G: Galvanized
- S: Stainless Steel

www.watertecdust.com